


TYPICAL FOUNDATION CROSS SECTION

VILLAGE OF CLIVE
 IJD File No. _____
 Clive Permit No. _____

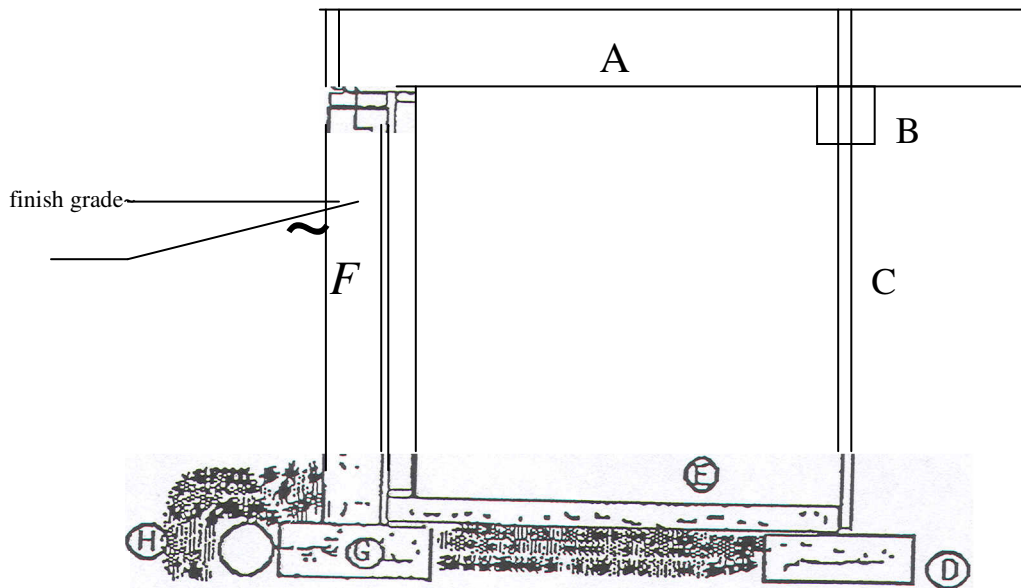

A. FLOOR

Subfloor
 Joists _____ x _____ = _____ o.c.

D.F. _____ Spruce _____ Other _____

B. BEAM

Size _____ ply _____ x _____

D.F. _____ Spruce _____ Other _____

Spacing between supports _____

C. COLUMNS.

Telepost. _____ 6"x 6" Wood _____ other _____

D. CONCRETE PAD FOOTINGS

Size _____ x _____ Reinforced: Yes _____ No _____

E. CONCRETE FLOOR SLAB

Slab thickness _____ Gravel thickness _____ c/w 6 mil poly

F. FOUNDATION-WALL

Exterior Dampproofing, _____ Concrete wall, Interior Dampproofing,

Min. R-8 Insulation 2' below grade, and 6 mil poly vapour barrier

NOTE: P.W.F. Foundations require engineered stamped plans.

G. CONCRETE STRIP FOOTINGS

Thickness _____ Width _____

H. DRAINAGE TILE

Min. 4" weeping tile covered with at least 6" of Crushed stone.

IJD INSPECTION SERVICES




3235A - 50 Ave.
Red Deer. AB T4N 3Y1
Ph: (403) 346-6533

VILLAGE OF CLIVE

IJD File No. _____

Clive Permit No. _____



FLOOR PLAN

(Draw in walls, doors, window and dimensions)